

# MONARCH

## LAMINATE 8 MM + 2 MM ATTACHED PAD

Construction	Water Resistant Core Laminate
Classification	EN 13329
Dimensions	8-1/32" Wide x 47-5/8" Long
Overall Thickness	12 mm (includes 2 mm XPS pad)
Attached Pad	2 mm XPS Sound Abatement Pad
Wear Surface	AC4
Texture	Embossed
Edge Profile	4-Sided Painted Bevel
Packaging	15.94 sf/carton - 68 cartons/pallet - 1083.9 sf/pallet 15.94 sf/carton - 64 cartons/pallet - 1020.2 sf/pallet

### Installation & Maintenance

Angle / Horizontal Tap

Transition: Transition required for rooms larger than 45' W x 45' L.

Ambient & Surface Temperature at Installation: 60 - 85 Degrees Fahrenheit

Maintenance: No Polish, Fresh Floors by Taylor


### Test Method & Requirements

Standard Laminate	EN 13329	Pass
Thickness (with Pad)	ASTM F386/ (387)	Pass
Wear Layer Thickness	ASTM F410	Pass
Squareness of Element	ANNEX A	Pass
Height Difference of Element	ANNEX B	Pass
Opening Between Element	ANNEX B	Pass
Tabor Abrasion	ANNEX E	Pass
Large Ball	ANNEX F	Pass
Small Ball	ANNEX F	Pass
24 Hour Thickness Swelling	ANNEX G	Pass
Resistance to Staining	EN 438	Pass
HPLC Gradient Chemical Analysis		Pass
Pull Test		Pass
Impact Insulation Class IIC	ASTM E492*	
Sound Transmission Class STC	ASTM E90*	

\*The flooring assembly dictates IIC, STC, HIIC, and Low IIC results; contact your representative for specific testing.

### Health & Environment

GreenGuard Gold # 257043-420

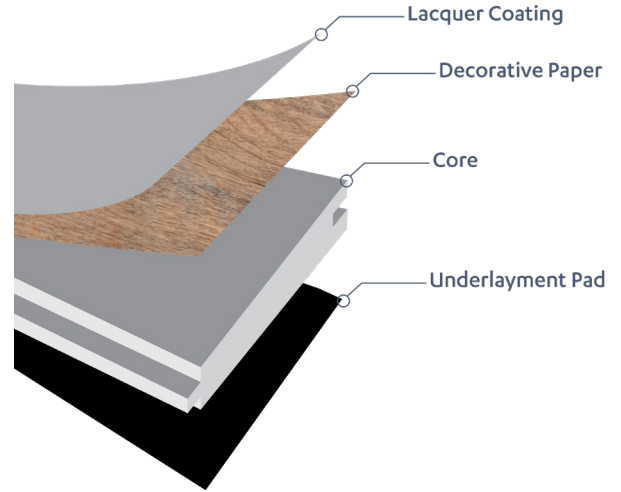

### Warranty

10 Yr Light Commercial, 10 Yr Multi-Family, Lifetime Residential

### Accessories

Trims: T Mold, Reducer, End Cap, Stair Nose, Quarter Round

### Layout Options:

